



# TIMELY FRAMING SPECIFICATIONS

## ROUGH OPENING DIMENSIONS

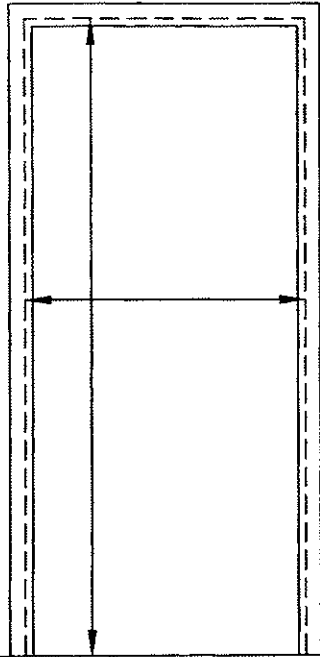


### Door

Nominal Door Width + 1 1/4"  
Jamb Height + 1"

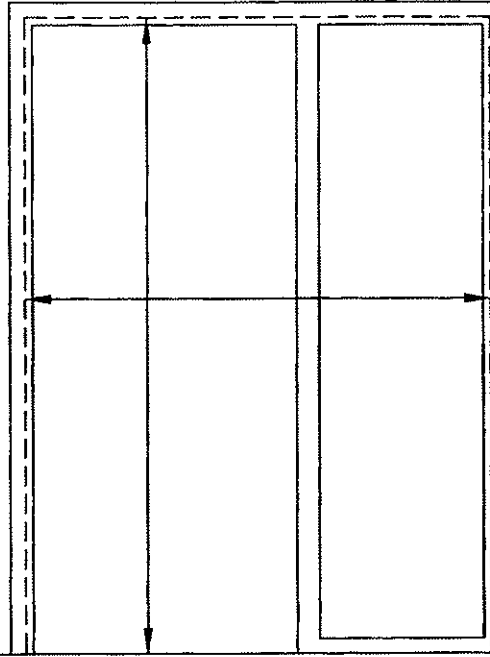


### Door With Sidelite

Nominal Door Width + Sidelite +  
2" for Each Mullion + 1 1/4"  
Jamb Height + 1"




### Borrowed Lite

Width = Rabbet to Rabbet + 1 1/4"  
Height = Rabbet to Rabbet + 1 1/4"  
Note: Actual Glass Size is Smaller.  
Always Measure Frame Before  
Ordering Glass.



2" Minimum Stub Wall is Required.

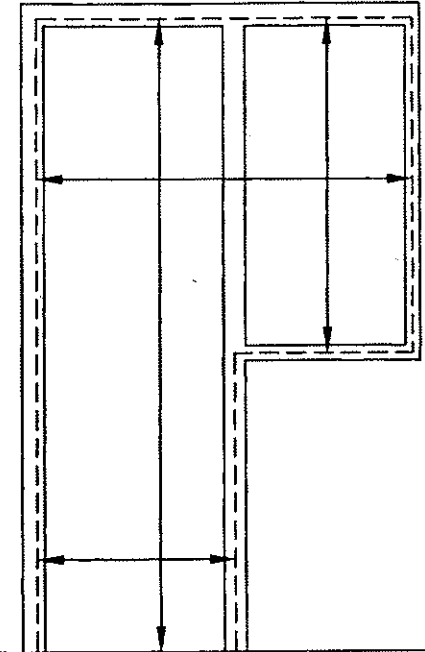

### Door and Partial Sidelite


**UPPER:** Nominal Door Width + Sidelite +  
2" for Each Mullion + 1 1/4"

**LOWER:** Nominal Door Width + 1 1/4"  
Jamb Height + 1"

Sidelite Height: Rabbet to Rabbet + 1 1/4"

### RECOMMENDED FASTENERS:

Wood or Metal Stud Drywall Fasteners by General Contractor  
For Metal Studs Use 'Fine Thread' Drywall Screws  
For Wood Studs Use 'Coarse Thread' Drywall Screws  
All Frames Require One Fastener Beside Every Casing Clip

|   |               |            |
|---|---------------|------------|
| <br>PREFINISHED STEEL DOOR FRAMES<br><br><b>FRAME SCHEDULE</b> | PRESENTED BY: | PROJECT:   |
|   |               | JOB NO:    |
|   |               | DATE:      |
|   |               | REV. DATE: |